


Chip Ferrite Bead SMD Type Size 1206





$Z @ 100 \text{ MHz}$
 $\pm 25\%$
 R_{DC}
 I_R
 Quantity: 3000pcs

ΔT referring to 20K self-heating above ambient temperature

Dimensions: [mm]

Land Pattern: [mm]








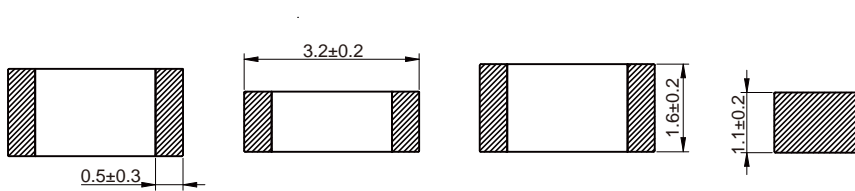


Electrical Properties:

Part No	Z @ 100 MHz	Tolerance	R _{DC}	I _R
FBA1206-260-501R		±25%	0.20	500
FBA1206-310-501R		±25%	0.20	500
FBA1206-420-501R		±25%	0.20	500
FBA1206-500-501R		±25%	0.20	500
FBA1206-700-501R		±25%	0.20	500
FBA1206-900-501R		±25%	0.20	500
FBA1206-121-901R		±25%	0.15	900
FBA1206-151-901R		±25%	0.15	900
FBA1206-221-701R		±25%	0.35	700
FBA1206-301-701R		±25%	0.35	700
FBA1206-471		±25%	0.35	400

I_R referring to 20K self-heating above ambient temperature

Typical Electrical Characteristics:

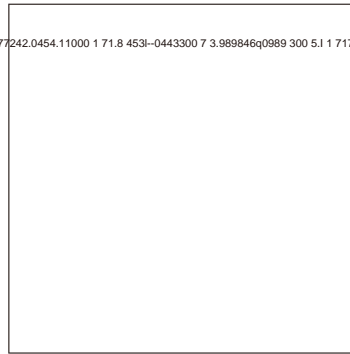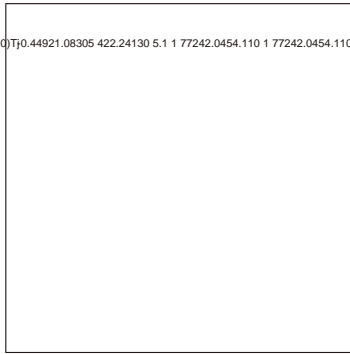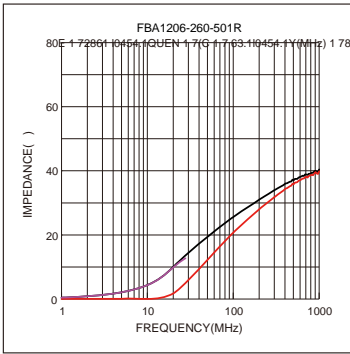

Reel Dimension: [mm]

