





FBE Series

CHARACTERISTICS

- Monolithic inorganic material construction.
- Closed magnetic circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quantity: 4000pcs

APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

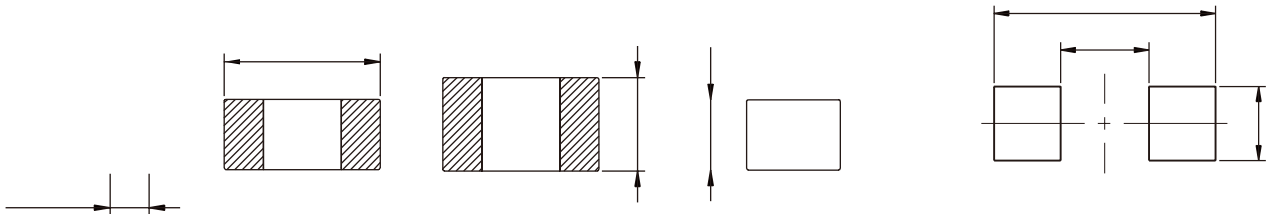



	(mm)	()		(max) ()	Current (max) (mA)
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		
			±25%		

Operating Temperature: -55°C ~ +125°C

Temperature rise current the actual value of DC current when the temperature rise is T40C

