



Typical Electrical Characteristics:

Typical Electrical Characteristics:

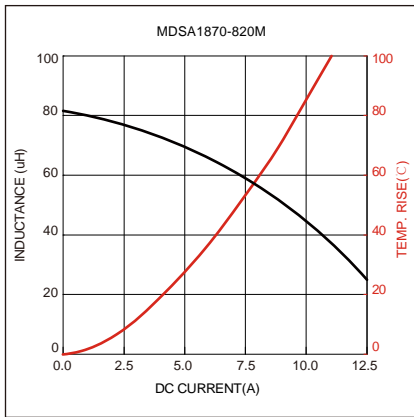

Soldering Reflow:

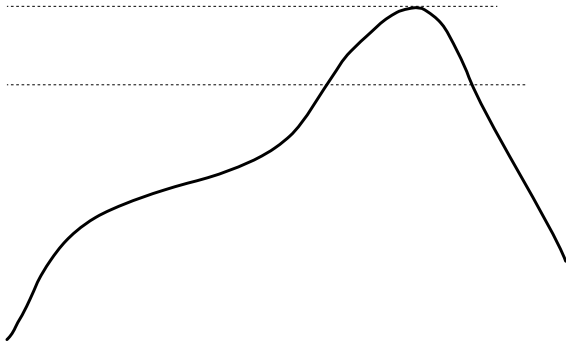

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C: 60~90 sec.


Max temperature: 260°C.

Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension :

Peel force of top cover tape:

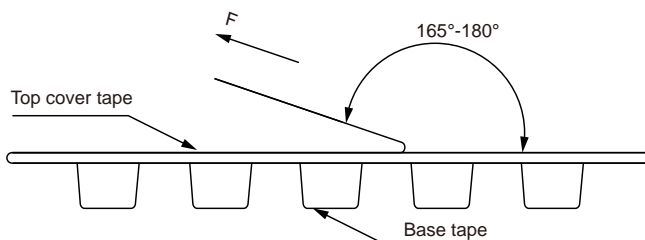


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

Marking	KH+Printing (Inductance)
---------	--------------------------



Reel Dimension: [mm]

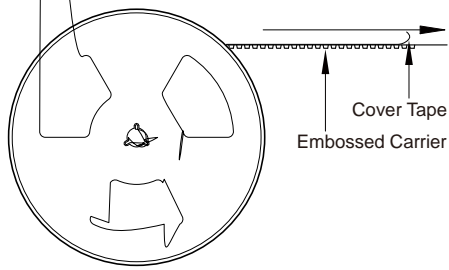


2.2±0.5

330±2.0

97±0.5

32.0±0.5


Packaging Quantity:

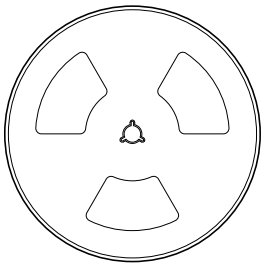

200 Pcs/Reel



2 Reel /Inner box(400 Pcs)



2 Inner box/Carton box(800 Pcs)

Cautions and Warnings:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.

●

●

●

●

●

●

●