

MDTA Series




FEATURES

- Flat wire coil for low copper losses
- / όψμύσώδης όύος ψύόσολύρ ήρύχσ '1η'1 σύύήοήγύό όήοοσύόσ
- 3Sobl PύX ήόύήσγό όύόσ ήός φSobl PύX Pήέε°S Sήb όύόσ
- High current cήήόήόύή ήός '1ήSήσ '1η'1 ήήόήόήό current spiEes
- AE/ v ξήήήόύS
- ήμSοήγ° όSψμSοήόήό ύύ C LόόήSήό σSή όSψμSοήόήό όήS
- vήήόήόύ ήόσ

APPLICATION

- 5/ 5/ όύόφSούSοσ ύύό SόύSοήήόψSό όήή° ήγύό σήόSψσ Noise supprSοήό for motorσ XήόSήήS wipers / power seats/ μύXSο ψόόόόσ '1Sήγ° ήός φSόήήγύό όήόXSοσ 1L5 ή°ήγ°
- [95 Sόήers

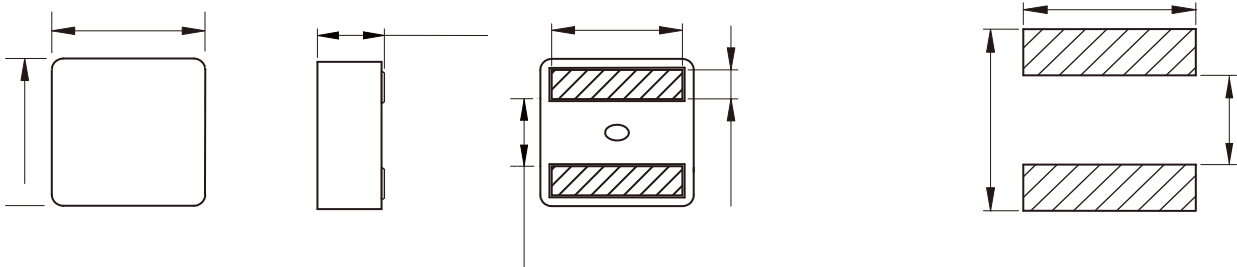

Part No	L@100KHz /0.1V (μH)	Tolerance	I _{SAT} Typ. (A)	I _R (A)		R _{DC} Max. (mΩ)
				20°C rise	40°C rise	
a5E! w a		±20%				
a5E! w a		±20%				
a5E! w a		±20%				
a5E! w a		±20%				
a5E! a		±20%				
a5E! a		±20%				
a5E! a	22	±20%				
a5E! a		±20%				

