

## MDTE Series


Wire Wound Molded SMD Power Inductors

Size 1580


### FEATURES

- So saturation
- High current, low DCR, high efficiency
- 
- 
- 
- 
- 

Dimensions: [mm]

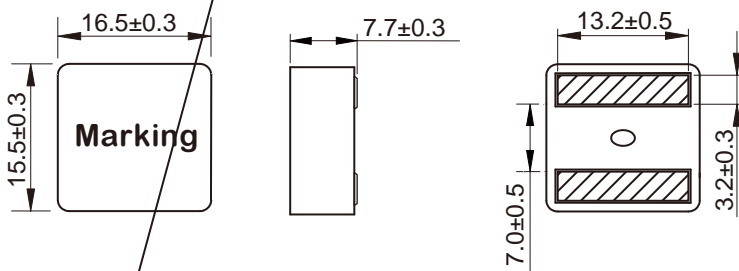


Land Pattern: [mm]



Electrical Properties:

## Soldering Reflow:

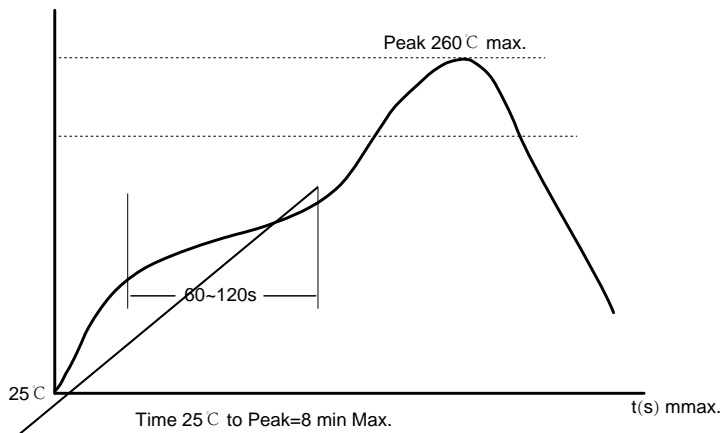

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C: 60~90 sec.

Max temperature: 260°C.

Max time at max temperature: 10 sec.


Allowed Reflow time: 2x max.

## Packaging Information:

### Tape Dimension:

| Series   | A0 (mm)  | B0 (mm)  | D (mm)  | P0 (mm) | P1 (mm)  | W (mm)   | K0 (mm) | E (mm)   | T (mm)   |
|----------|----------|----------|---------|---------|----------|----------|---------|----------|----------|
| MDTE1580 | 17.0±0.1 | 16.0±0.1 | 1.5±0.1 | 4.0±0.1 | 24.0±0.1 | 32.0±0.3 | 8.5±0.1 | 1.75±0.1 | 0.5±0.05 |

### Peel force of top cover tape:

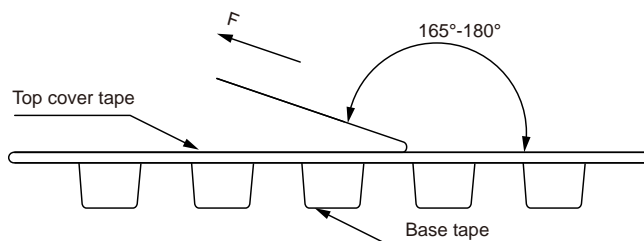

The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension: [mm]



Packaging Quantity: