



**WWCI Series**  
SMD Wire Wound Ceramic Inductor  
Size 0603

**CHARACTERISTICS**


- ± 0.5% tolerance at 25°C, 100kHz, 100mA, 0.1s pulse, 100% duty cycle
- U = 1000V
- 0.5% tolerance at 25°C, 100kHz, 100mA, 0.1s pulse, 100% duty cycle
- j = 0.5%

**APPLICATION**

- = 7

Dimensions: [mm]

Land Pattern: [mm]

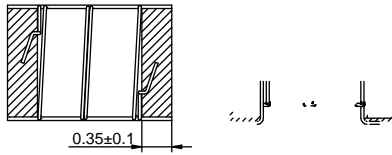


Electrical Properties:





## Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

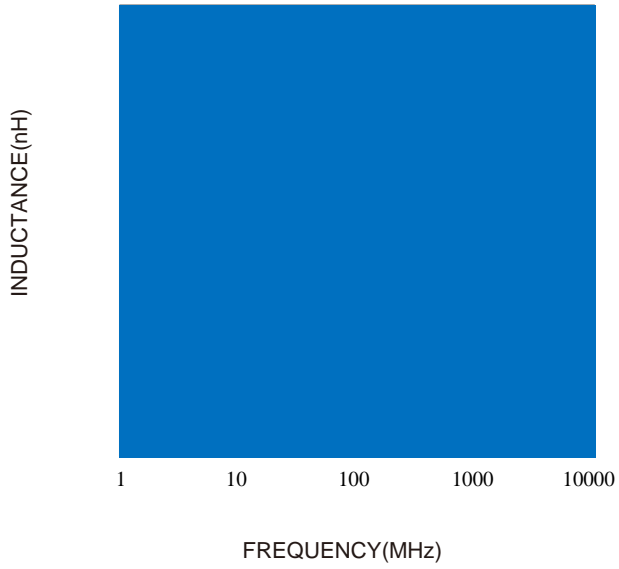

Temperture Rise VS. Frequency Characteristics:

