

WWCIHC Series

SMD Wire Wound Ceramic Inductor
Size 0402

CHARACTERISTICS


- Wire wound with high Q and high SRF
- More stable due to ceramic design
- Small size and small tolerance available
- Quantity: 10000pcs

APPLICATION

- HF application

Dimensions: [mm]

Land Pattern: [mm]




Electrical Properties:



	0.080	5.40
	0.065	5.40
	0.070	5.00
	0.080	

Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

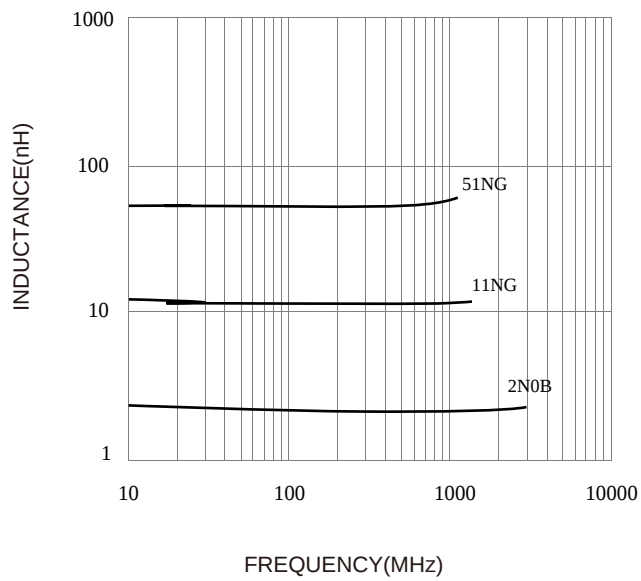

Temperture Rise VS. Frequency Characteristics:

